


**STRIPES NOTES:** These dimensions were taken off an original, unrestored GT/CS (cover car). At the factory, some stripes applied varied in dimension. Most variations are within 1/4" up or down. Side stripes generally follow the raised body line and do not "slope" (which so often happens). You will need to mark off your car first with masking tape at the top edge and step back to "eyeball" accuracy for a straight, continuous stripe. Soapy "suds" applied to a (waxless) painted surface will ease positioning of stripes. All stripes fold over at edges with about 1" excess.

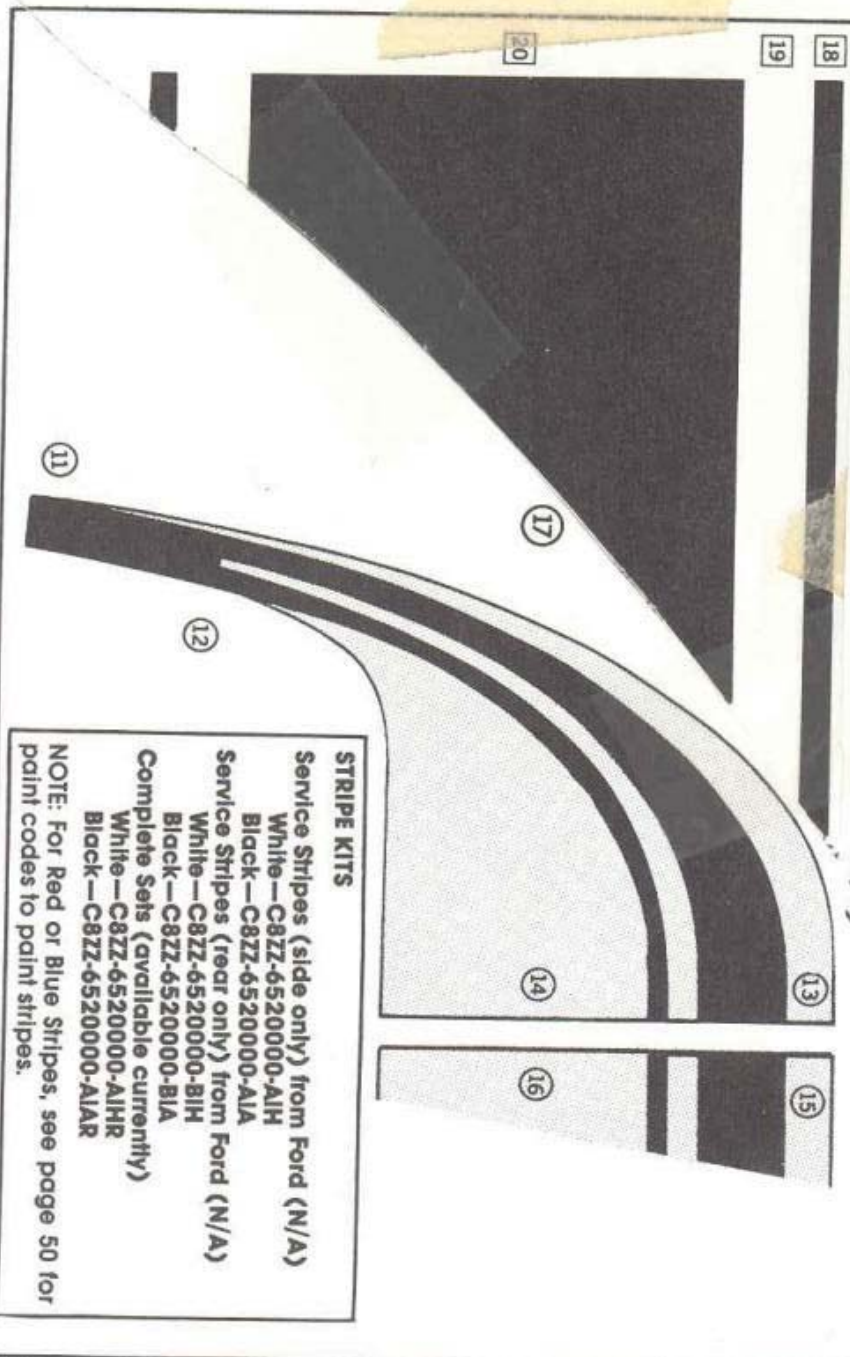

#### STRIPES KITS

**Service Stripes (side only) from Ford (N/A)**  
 White—C8ZZ-6520000-AIH  
 Black—C8ZZ-6520000-AIA  
**Service Stripes (rear only) from Ford (N/A)**  
 White—C8ZZ-6520000-BIH  
 Black—C8ZZ-6520000-BIA  
**Complete Sets (available currently)**  
 White—C8ZZ-6520000-AIHR  
 Black—C8ZZ-6520000-AIAR

**NOTE:** For Red or Blue Stripes, see page 50 for paint codes to paint stripes.

**ALL DIMENSIONS ARE "TAT," AND DO NOT FOLLOW CURVATURE OF BODY.**

1. From body line to top of stripe—3-3/4"
2. Stripe spacing from edge of stripe to wheel well (front) upper part 9", lower part 2-3/4". Same as No. 2 (rear); upper part 8", lower part 3-3/8" to wheelwell. Both No. 2 and 3 dimensions follow contour of wheelwell flare. (See No. 17 for curve).
3. Body line to top of stripe at front of door 4".
4. Body line to top of stripe at rear of door 4-1/8".
5. Side scoops (as viewed straight on—not measured by contour of scoop) top of scoop to top of stripe approx 3".
6. From bottom of stripe to bottom of scoop approx 3-1/2". Note: Scoop stripe must be centered on scoop to match "slope" of stripe on doors. GT/CS graphic is also centered on scoop between front and rear (as would the HCS shield). Removal of scoop to apply stripe recommended. Front of stripe on scoop folds around into "intake," then scoop inserts added.
7. Bottom of stripe to bottom edge of door 9-1/2".
8. Bottom of stripe to top of marker light chrome bezel 4-1/8". You must remove headlight bucket to fold over strip into end of fender.
9. End Cap Stripe—(LH) Bottom width of stripe equals width of bottom of end cap. Fold over stripe at bottom edge.
10. Beginning of gap in stripe to bottom of end cap 2-1/2".
11. Top of end cap to top of stripe at inside edge 11/16". (See No. 15).
12. Bottom of stripe to lower edge of end cap 3-3/8"
13. Top edge of deck lid to top of stripe 7/8". Continuous width along entire curved top edge of deck lid—not straight.
14. Bottom of stripe to lower edge of deck lid 3-1/4" to max. of 4" at center of deck lid. (Note: Deck lid must be near equal in height to end caps for stripes of each to match).
15. Actual size of stripe. Stripe cut (see No. 3 on dia.) at exact curvature of stripe where it meets wheelwell flare. Reverse for opposite side stripe.
16. Top stripe width (actual size shown) slightly less than 1/8".
17. Space between top and middle stripe (or middle to bottom stripe) 1/4".
18. Width of middle stripe 1-15/16".